




TRX Krzysztof Kryński

Description of the ISDN BRI U interface board

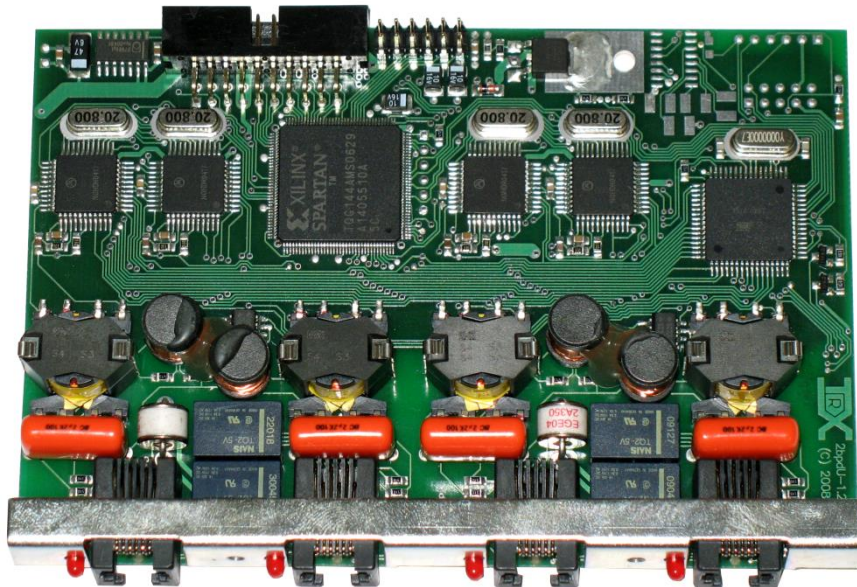

No. of lines:	2 or 1
No. of channels:	4 or 2
Input connector:	RJ-12
Connection mode:	in series
Power consumption:	< 0,4 W
Supported standards and protocols:	U interface (I.430), G.711 (Alaw) coding, DSS1 signaling: Q.921, Q.931,
Basic features:	<ul style="list-style-type: none">- recording of audio signal from interface board's channels,- recording of calling and called party numbers,- collection COLP number (if available),- recording of unconnected calls,- signaling ISDN line status (LED).
Additional features:	<ul style="list-style-type: none">- collection of the call waiting duration,- remote firmware upgrade is possible.- other (on request).
Dimensions (W x H x D):	132 x 17 x 94