




Description of the active ISDN PRI interface board

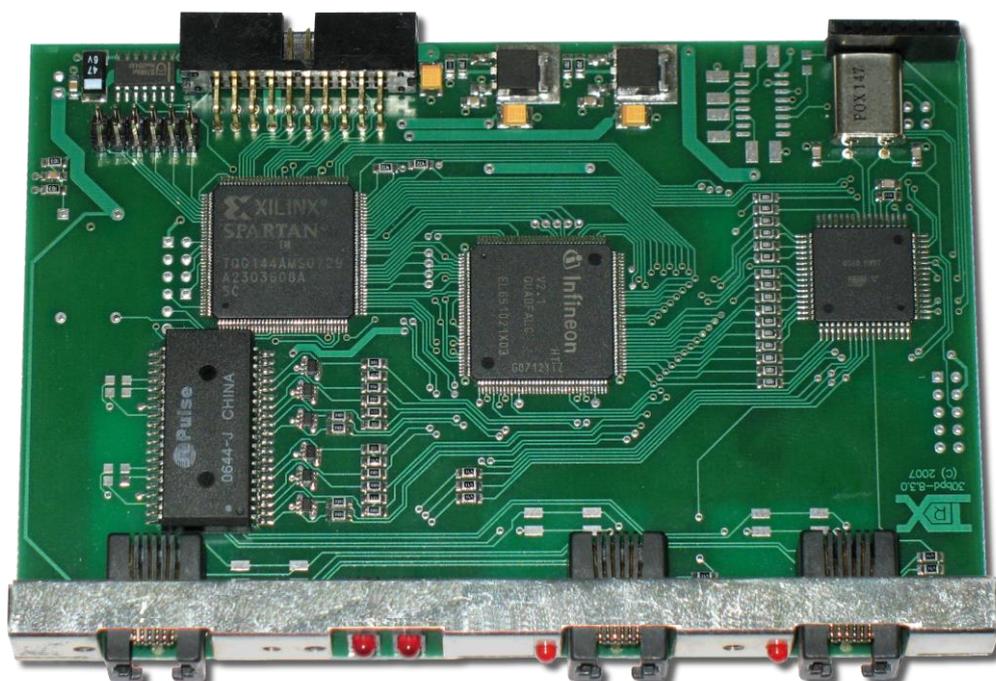

No. of lines:	1 / 2
No. of channels:	30
Input connector:	RJ-12
Connection mode:	in parallel or terminal
Power consumption:	< 0,5 W
Supported standards and protocols:	E1 (G.703) interface, G.711 (Alaw) coding, - CAS signaling to interworking with Alcatel and Siemens PBX, - DSS1 signaling: Q.921, Q931, - MFC R2 signaling (full and simplified variant): Q.421.
Basic features:	- recording of audio signal from interface board's channels - CTI integration of TRX recorders with Alcatel and Siemens PBX platforms, - recording of calling and called party numbers - collection COLP number (if available) - recording of unconnected calls - signaling PRI line status (LED's)
Additional features:	- collection call receiving waiting time - remote firmware upgrade is possible - other (on request)
Dimensions (W x H x D):	132 x 17 x 94