




TRX Krzysztof Kryński

Description of the ISDN BRI S/T interface board

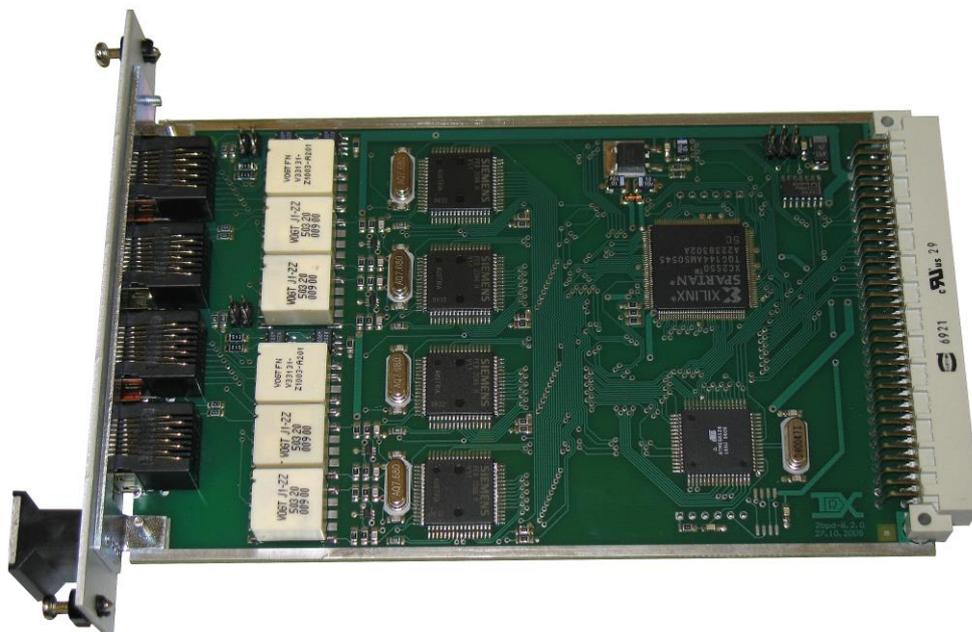

No. of lines:	2
No. of channels:	4
Input connector:	RJ-45
Connection mode:	in parallel
Power consumption:	< 0,4 W
Supported standards and protocols:	I.430 (S/T interface), DSS1, Q.921, Q931, G.711 (Alaw)
Basic features:	<ul style="list-style-type: none">- recording of audio signal from board's channels- recording of calling and called party numbers- collection COLP number (if available)- recording of unconnected calls- signaling the mode of operation of ISDN line
Additional features:	<ul style="list-style-type: none">- collection call receiving waiting time- BOSCH TN1R6 protocol support- remote firmware upgrade is possible- other (on request)
Dimensions (W x H x D):	132 x 26 x 180