




Description of the analogue - system phone interface board

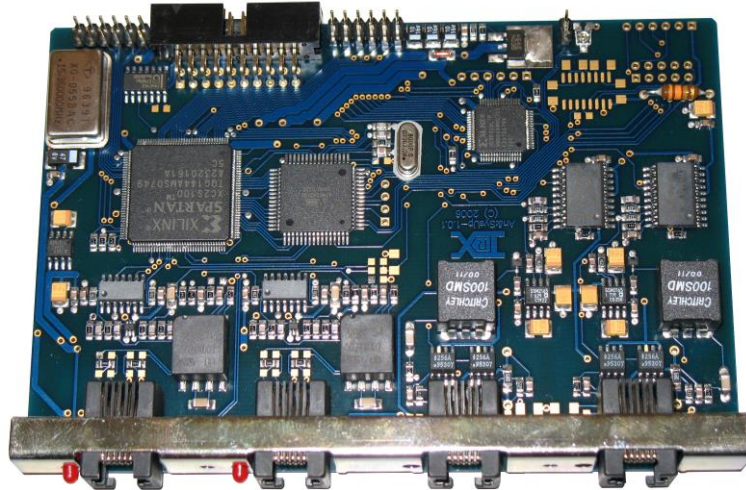

No. of lines:	4 (2 analogue + 2 system phone)
No. of channels:	4 (2 analogue + 2 system phone)
Input connector:	RJ-12
Connection mode:	in parallel ⇒ <i>system part</i> in series – phone ⇒ <i>analogue part</i> in parallel – radiotelephone, phone ⇒ <i>analogue part</i>
Input level:	50 mV - 2 V (AGC implemented) ⇒ <i>analogue part</i>
Input impedance:	> 30 kΩ ⇒ <i>analogue part</i>
Channel crosstalk:	< -63 dB ⇒ <i>analogue part</i>
Power consumption:	< 0,4 W
Supported phone system standards:	Alcatel, Bosch, Coral, DGT, Ericsson, Kapsch, LG, Avaya, Matra, Panasonic, Philips, Platan, Siemens, Slican ⇒ <i>system part</i> <u>one system on one board</u>
Basic features:	- recording of audio signal from board's channels ⇒ <i>system part</i> - recording of phone display content (except DGT) ⇒ <i>system part</i> - collection called party number ⇒ <i>system part</i> - recording of unconnected calls ⇒ <i>system part</i> - full support for two phones on the line ⇒ <i>system part</i> (<i>Panasonic, Siemens, Alcatel</i>)
Additional features:	- registration records from the first incoming ring ⇒ <i>system part</i> - recording control with the function keys ⇒ <i>system part</i> - remote firmware upgrade or change of the supported system is possible - other (on request)
Dimensions (W x H x D):	132 x 17 x 94